

+4°C ÷ +90°C
subject to application



Working pressure:
14 Bar (at 20°C)
depending on the tube used



Compressed air, water and
fluids suitable with construction
materials



Taper gas BSPT ISO 7
R1/4"



Body: Nylon 66
Seal: NBR
Internal parts: Acetal resin
Spring: Stainless steel AISI 316
Connection: Acetal resin

FEATURES

The fittings of this series have plastic thread and consequently we recommended to avoid excessive force during screwing and to teflon the thread before to use it in order to prevent any type of loss.

AVAILABILITY

EPDM seals available on request




Products in compliance with
EC Regulation 1907/2006



Products in compliance with
the directive EU 2015/863

CONSTRUCTION DETAILS

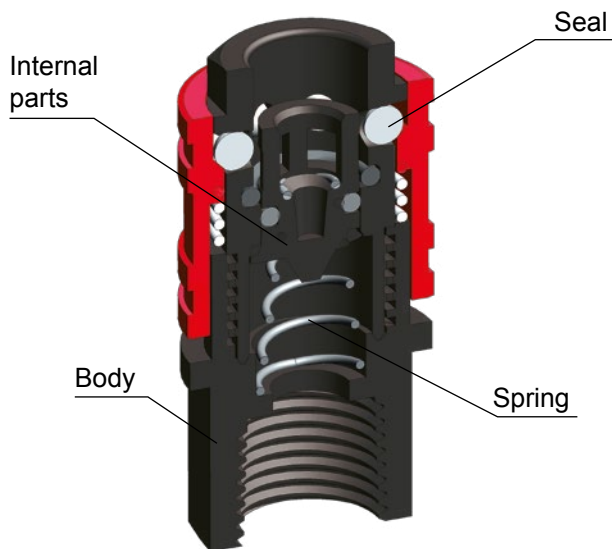


TIGHTENING TORQUE TAPER GAS BSPT ISO 7

THREAD	1/4"
Nm	0,8



8001


Female nylon quick coupling BSPT thread



CODE	T	I	L	H	g
8001TR14	R 1/4"	10,0	44,0	19	14,2

8006


Male acetal resin connection BSPT thread



CODE	T	I	L	C	H	g
8006TR14	R 1/4"	10,0	31,2	14,0	17	3,9

8007


Female acetal resin connection BSPT thread



CODE	T	I	L	C	H	g
8007TR14	R 1/4"	10,0	28,6	14,0	17	3,6

8008

Acetal resin connection with barb connector



CODE	ØD	BARB	I	L	C	ØH	g
8008TR5	5	6,0	22,0	37,8	14,0	16,7	2,1
8008TR6	6	8,0	24,0	39,8	14,0	16,7	2,35
8008TR8	8	10,0	26,0	43,2	14,0	16,8	3,25
8008TR10	10	12,0	26,0	43,2	14,0	16,8	3,85
8008TR12	12	14,0	28,0	43,2	14,0	16,8	4,15

