

-5°C ÷ 60°C



From 0 to 10 Bar

**FLOW DROP**  
Approx. 12%



Water



Taper BSPT ISO 7  
from R1/8" to R1/4"



**Body:** Polypropylene +30% GF  
**O'Rings:** EPDM

**ADVANTAGES**

Capacity to handle a wide range of aggressive chemicals. Suitable for applications such as filtering system.



Products in compliance with the directive 2002/95/EC


**RoHS2**

Products in compliance with the directive 2011/65/EU


**WRAS**  
Water Regulations Authority Scheme

**9030**

Three ways valve male BSPT

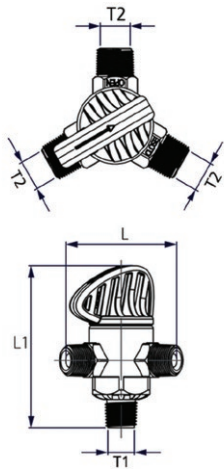


CODE	T1	T2	L	L1	GR.
9030TR18	R1/4"	R1/8"	49,7	68,3	70
9030TR14	R1/4"	R1/4"	52,0	68,3	70



The arrow on the handle indicates the direction of the flow.

**9031**

Three ways valve male for tube 8/5.5

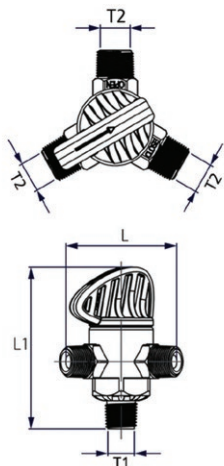

CODE	T1	T2	L	L1	GR.
9031TR8	R1/4"	8X5,5	51,7	58,8	70



The arrow on the handle indicates the direction of the flow.

