

VITON: from -20°C to 205°C

EPDM: from -40°C to 130°C



20 Bar




Pneumatic applications in corrosive environments in contact with water, gases and weak acids suitable for food industry, chemical industry, medical application, laboratories of analysis, desalinization plants and boats.



Parallel BSPP UNI ISO 228/1 from G1/8" to G1"



One way fluids flow.
Indication of the fluid direction engraved on the body.

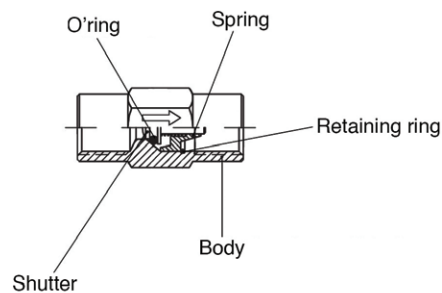

Body: stainless steel AISI 316L

Shutter: stainless steel AISI 316L

Spring: stainless steel AISI 302

O'ring: VITON

Retaining ring: stainless steel AISI 302

ADVANTAGES

- Available with EPDM o'rings.
- On demand available different springs for different opening pressures.
- Available to be supplied degreased.
- Available on demand also for NPT thread



Products in compliance with the directive 2002/95/EC

RoHS2


Products in compliance with the directive 2011/65/EU



MINIMUM OPEN PRESSURE

1/8	1/4	3/8	1/2	3/4	1
0.35	0.30	0.25	0.08	0.10	0.80

1730



Check valve BSPP thread Inox AISI 316L

CODE	T	L	H	GR.
1730TR18	G1/8"	40,0	17	48
1730TR14	G1/4"	41,0	17	43
1730TR38	G3/8"	47,0	22	84
1730TR12	G1/2"	56,0	27	143
1730TR34	G3/4"	66,5	36	330
1730TR1	G1"	79,0	41	388

