


EU-75S-E


Safety quick coupler with barb connector

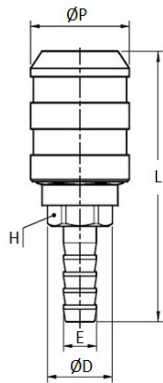

CODE	ØE	L	ØD	ØP	H
EU-75S-E6	7,20	61,1	21,5	28,5	19
EU-75S-E8	9,20	61,1	21,5	28,5	19
EU-75S-E10	11,2	65,1	21,5	28,5	19
EU-75S-E12	13,2	70,1	21,5	28,5	19
EU-75S-E13	13,8	70,1	21,5	28,5	19

EU-75S-PM

Joint push-on fitting

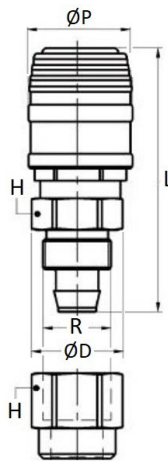


CODE	Ø TUBE	D	R	P	L	H
EU-75S-PM08	8X12	21,3	M16X1	28,5	65,2	19
EU-75S-PM10	10X15	24,3	M20X1	28,5	70	22

To used with PU-PVC

AEU-75M

Male connection

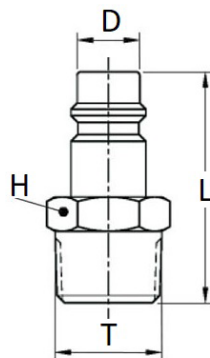

CODE	T	D	L	H
AEU-75M	R1/4"	10	36,5	14
AEU-75M-X	R1/4"	10	36,5	14
AEU-75M-316	R1/4"	10	36,5	14
AEU-75M38	R3/8"	10	37,0	17
AEU-75M38-316	R3/8"	10	37,0	17
AEU-75M12	R1/2"	10	42,0	22
AEU-75M12-316	R1/2"	10	42,0	22

