

From -10°C to +95°C with NBR seal
 From -15°C to +200°C with VITON seal
 From -40°C to +95°C with EPDM seal
 From -60°C to +200°C with SILICONE seal



Suggest: from 0 to 12 Bar
Max: 35 Bar



Air, water, gas, vacuum, mineral and synthetic acids (not aggressive for the brass version) and fluids suitable with construction materials




Taper gas from R1/4" to R1/2"
 Parallel gas from G1/4" to G1/2"

FLOW
 384 l/min

DN 4,2 mm

CONFIGURATIONS
 PL or SO



Products in compliance with the directive 2002/95/EC

RoHS2


Products in compliance with the directive 2011/65/EU



COMPONENTS	CD-12	CD-12-X
Body	Nickel-plated steel	Stainless steel AISI 303
Adaptor	Nickel-plated steel	Stainless steel AISI 303
Slide	Nickel-plated steel	Stainless steel AISI 303
Valve	Stainless steel AISI 303	Stainless steel AISI 303
Seal	NBR, Viton, EPDM, Silicon	NBR, Viton, EPDM, Silicon
Washer	Stainless steel AISI 304	Stainless steel AISI 304
Clip	Stainless steel AISI 301	Stainless steel AISI 301
Spring	Stainless steel AISI 302	Stainless steel AISI 302

CONNECTION	ACD-12	ACD-12-X
Body	Nickel-plated steel	Stainless steel AISI 303

FLOW DROP

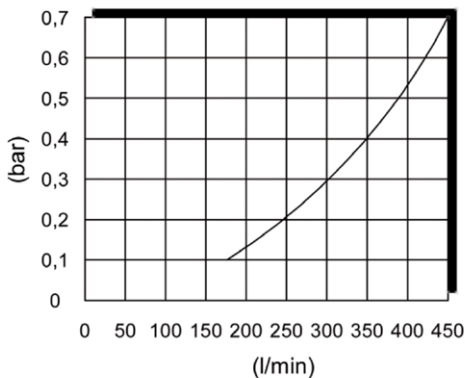

All charts have been created considering a pressure of 6 Bar with low drop of 0.5 bar and simple lock

